

- Model NO.: 6FM100
 - Usage: UPS, Electric Power, Lighting
 - Discharge Rate: Low Discharge Rate
 - Electrolyte: Acid
 - Rechargeable: Chargeable
 - Voltage: 12V
 - Approx Dimension(mm): 330*173*212
 - Terminal: T11
 - Specification: CE, SGS
 - HS Code: 850720000
-
- Type: Lead-Acid Batteries
 - Nominal Voltage: 12V
 - Shape: Square Battery
 - Installation: Fixed
 - Model No.: 6FM100
 - Capacity: 100ah/20hr
 - Total Weight: 30.4kg
 - Trademark: TIGER HEAD
 - Origin: Guangzhou, China










-

FEATURES

- .Maintenance-free, no water adding required
- .Sealed Valve-Regulated
- .Spill proof/leak proof
- .Deep discharge protection
- .Plate grids from lead-calcium alloy, free of antimony
- .No corrosion
- .Installs vertically or horizontally
- .Low gassing(unless overcharged)
- .Good cycling and stationary performance
- .Long shelf life
- .Rugged and vibration-resistant

Curve Picture

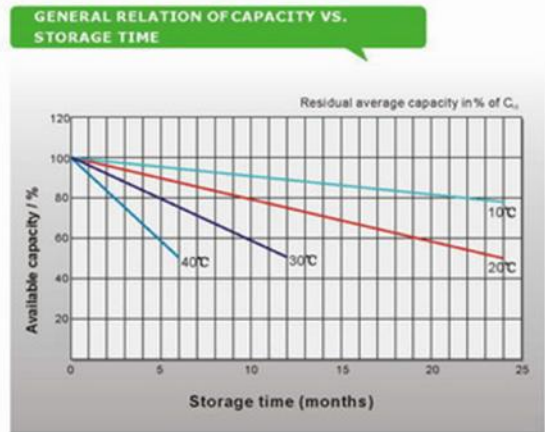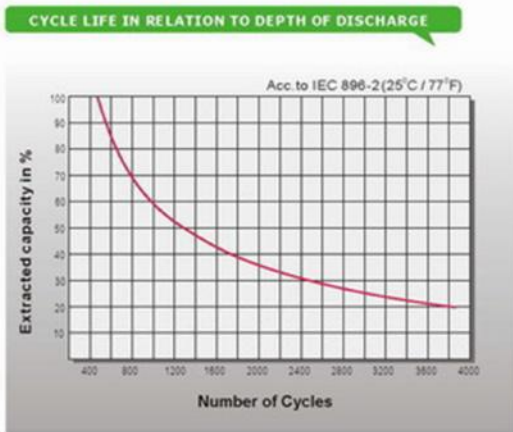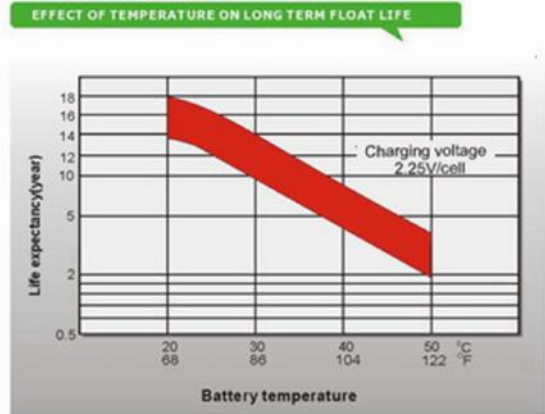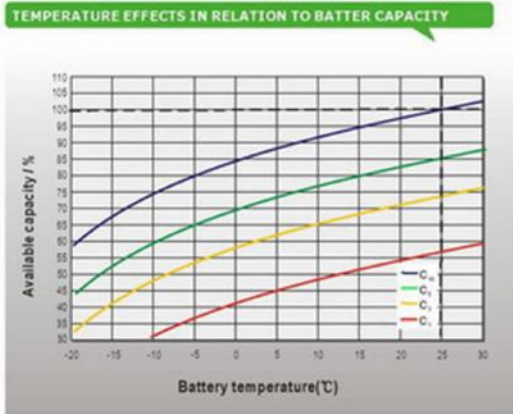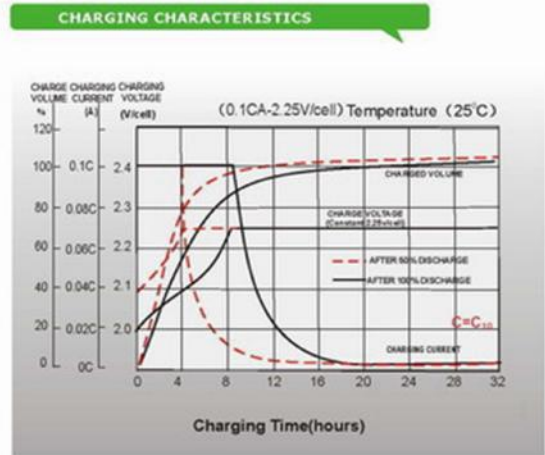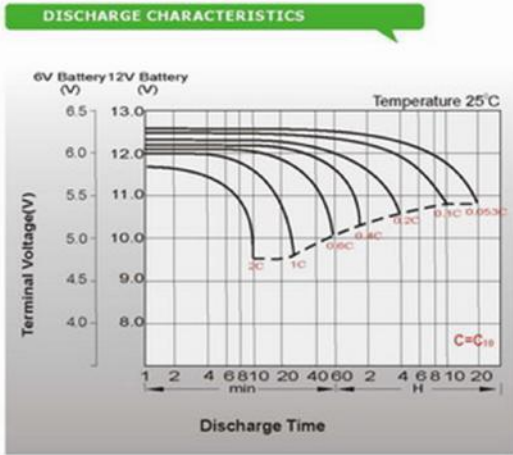

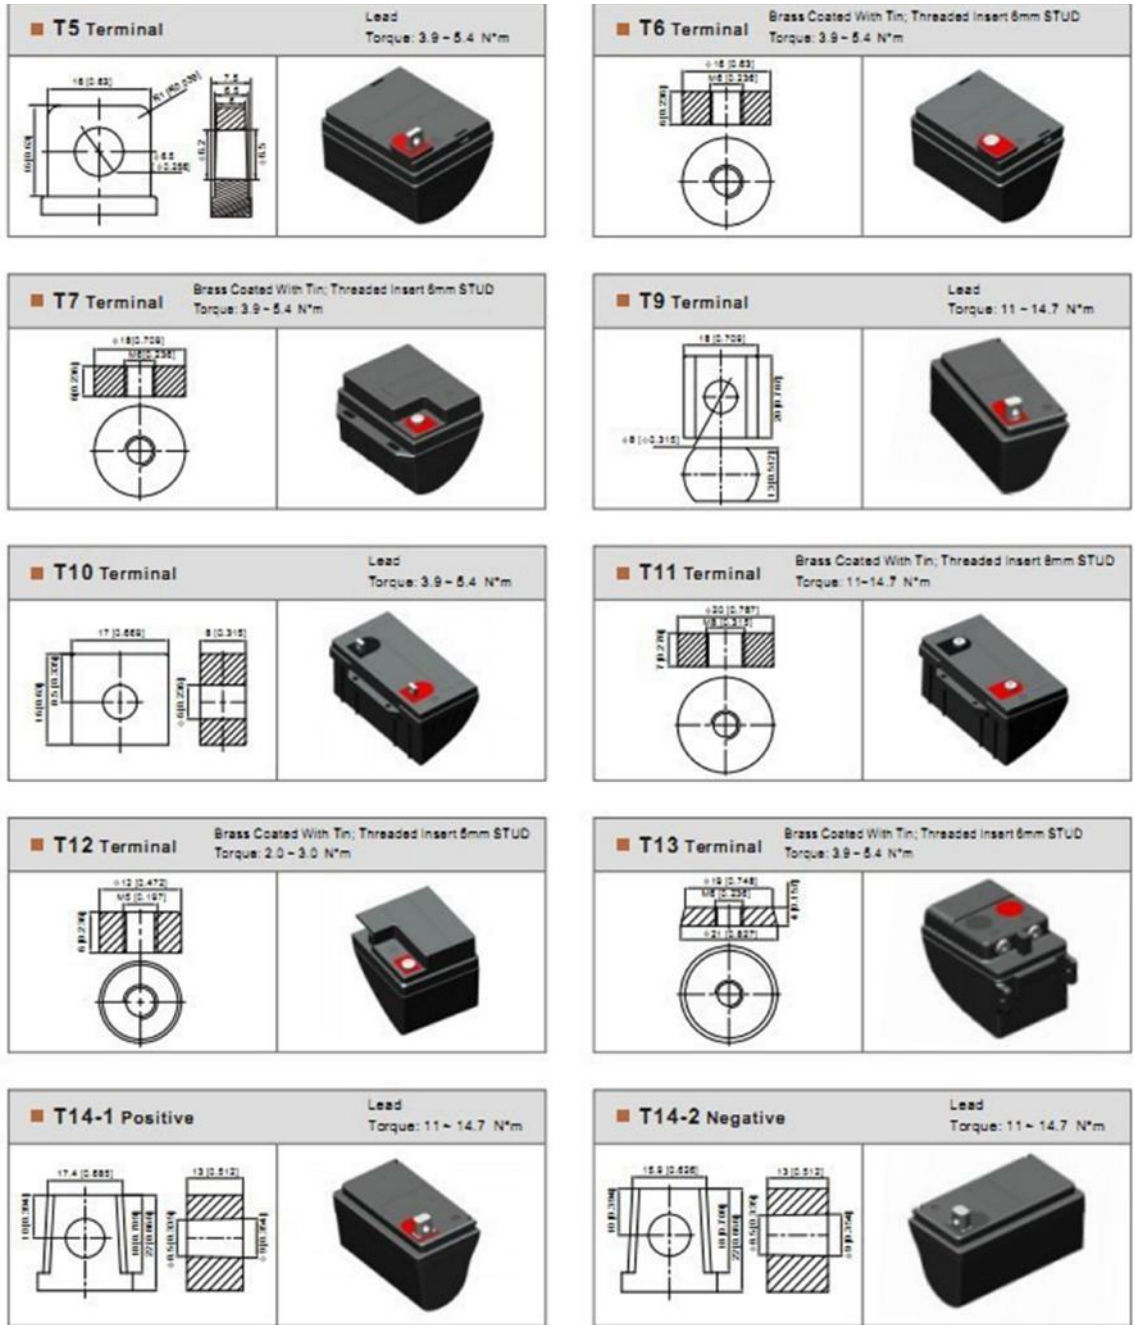

Specifications

Model	Nominal Voltage (V)	Rated Capacity(AH)				Approx Dimension								Approx Weight		Terminal Type
		20H R	10H R	5H R	1H R	Length		Width		Height		Total Height		Kg	Lbs	
	1.8 0 V/c ell	1.8 0 V/c ell	1.7 5 V/c ell	1.6 7 V/c ell	Mm	In.	Mm	In.	Mm	In.	Mm	In.	5.8			
TPG12-17	12	17	15. 8	13. 6	9.3 5	181 .5	7.1 5	77	3.0 3	167 .5	6.5 9	167 .5		6.5 9	5.8	12. 8

TPG1 2-26	12	26	24. 2	20. 8	14. 3	166	6.5 4	17 5	6.8 9	125	4.9 2	125	4.9 2	8.7	19. 2	T12
TPG1 2-31	12	30	27. 0	24	17. 1	195	7.6 8	13 0	5.1 2	164	6.4 6	178	7.0 1	10.7	23. 6	T5
TPG1 2-38	12	38	35. 3	30. 4	20. 9	197	7.7 6	16 5	6.5	170	6.6 9	170	6.6 9	13.5	29. 8	T6
TPG1 2-45	12	45	40	36	24. 8	257	10. 12	13 2	5.2	200	7.8 7	200	7.8 7	16.2	35. 7	T6
TPG1 2-50	12	50	46. 5	40	27. 5	229	9.0 2	13 8	5.4 3	205	8.0 7	211	8.3 1	16.6	36. 6	T6
TPG1 2-60	12	60	55. 8	48	33	325	12. 8	16 7	6.5 7	174	6.8 5	174	6.8 5	21.5	47. 4	T6
TPG1 2-65	12	65	60. 5	52	35. 8	325	12. 8	16 7	6.5 7	174	6.8 5	174	6.8 5	24	52. 9	T6
TPG1 2- 70H	12	70	65. 1	56	38. 5	259	10. 2	16 8	6.6 1	208	8.1 9	214	8.4 3	23	50. 7	T6
TPG1 2-85	12	85	78. 0	68	46. 8	305	12. 01	16 8	6.6 1	207	8.1 5	213	8.3 9	26.7	58. 9	T6
TPG1 2-100	12	96	90	80	55	330	12. 99	17 3	6.8 1	212	8.3 5	218	8.5 8	31	68. 4	T11
TPG1 2-110	12	110	102 .3	88	60. 5	410	16. 14	17 7	6.9 7	225	8.8 6	225	8.8 6	36	79. 4	T11
TPG1 2-125	12	130	121	104	71. 5	345	13. 58	17 2	6.7 7	274	10. 79	280	11. 02	47.3	104 .3	T11
TPG1 2-140	12	135	125 .6	108	74. 3	483	19. 02	17 0	6.6 9	238 .5	9.3 9	238 .5	9.3 9	44.2	97. 5	T11
TPG1 2-200	12	200	186	160	110	522	20. 55	24 0	9.4 5	218	8.5 8	224	8.8 1	62.9	138 .7	T11
TPG1 2- 200H S	12	214	200	174	124	522	20. 55	24 0	9.4 5	218	8.5 8	224	8.8 1	61.5	135 .6	T11
TPG6 -200	6	200	185	160	110	322	12. 68	17 8	7.0 1	228	8.9 8	234	9.2 1	31.3	69. 0	T11
TPG2 -65	2	65	60	51. 6	35. 2	170	6.6 9	72	2.8 3	205	8.0 7	212	8.3 5	5.2	11. 5	T6
TPG2 -100	2	96	90	77. 5	52. 8	170	6.6 9	72	2.8 3	205	8.0 7	212	8.3 5	6.2	13. 7	T6
TPG2 -150	2	144	135	116	79. 2	170	6.6 9	98	3.8 6	205	8.0 7	212	8.3 5	8.8	19. 4	T7
TPG2 -200	2	213 .3	200	172	117 .3	170	6.6 9	11 0	4.3 3	328	12. 91	337	13. 27	13.7	30. 2	T11
TPG2 -300	2	326 .6	300	263 .5	179 .6	170	6.6 9	15 0	5.9 1	328	12. 91	337	13. 27	20	44. 1	T11
TPG2 -400	2	435 .4	400	351	239 .5	210	8.2 7	17 5	6.8 9	330	12. 99	339	13. 35	Curv e Pictu re 25.5	56. 2	T11